WILSON CAEN

DEADWEIGHT GROUP
4000 dwt

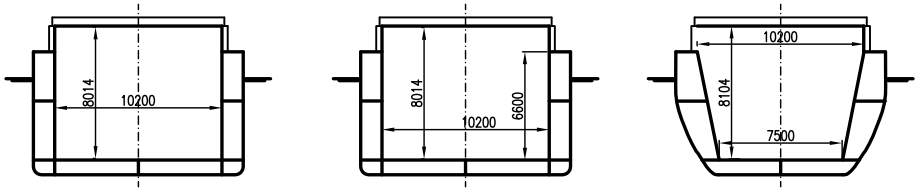

AFT CARGO BHD

MIDSHIP SECTION

FORW. CARGO BHD

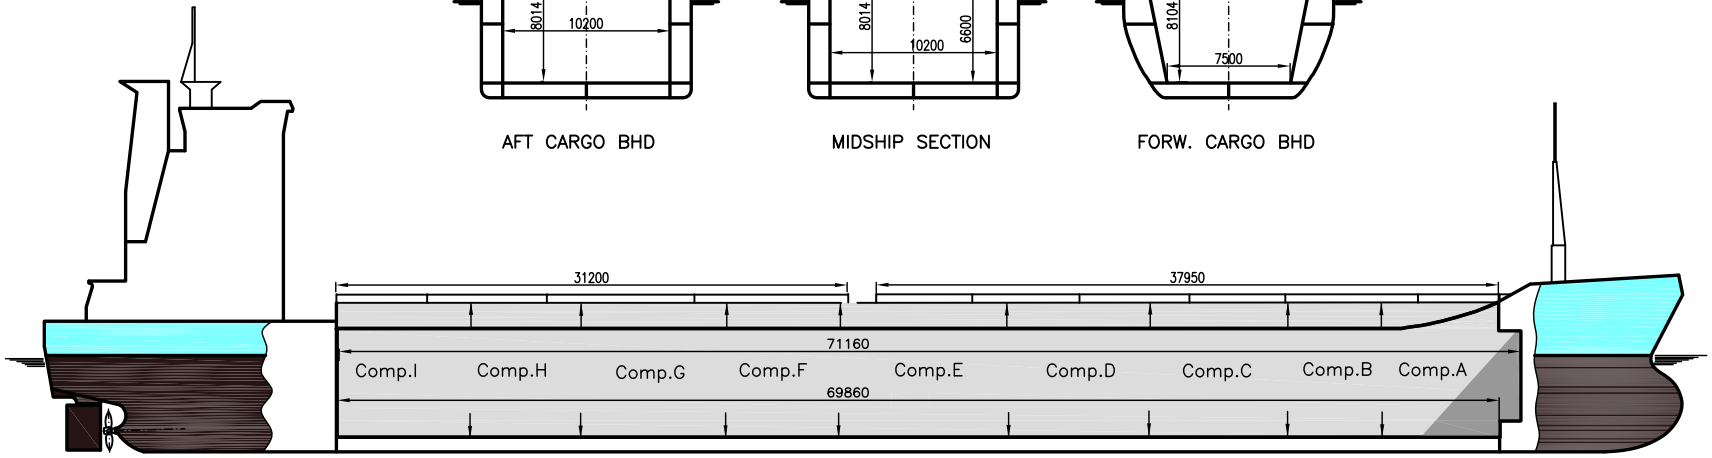

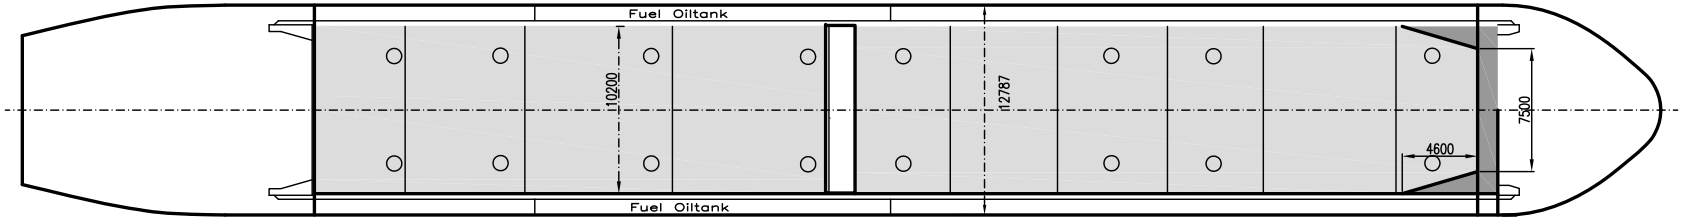

WILSON
· THE PREFERRED CARRIER ·

WILSON CAEN

Ex.	**Ducth Navigator**
DWT GROUP	**4000**
IMO NO	**9173290**
CALL SIGN	**8PRM**
BUILD	**04/1998**
FLAG	**Barbados**

If not otherwise specified :
Dist/Dim in meters
Weights in m.tons

All details given in good faith without guarantee

Builders	**Slovenske Lodenice, Komarno**
Classification	GL / 100 A5 E G Solas II-2, reg.19 MC E AUT
Length oa	99.91
Breadth mld	12.80
Depth mld	7.55
Draft summer	5.67
Deadweight summer draft	4450
Draft winter	5.55
Deadweight winter draft	4310
Gross tonnage	2999
Net tonnage	1733
Immersion(load draft) TPC	11.89
Mean draft of ship in heavy ballast	3.45
Distance from forward end of No.1 Hatch to aft end of last hatch	70.85
Hatch type	Mac Gregor Folding type
Container (TEU) capacity Hold / Deck	- / -

Max permissable load on deck, mt/sqm		1.70
Max permissable load on tanktop, mt/sqm		15.00
Max air draft - 1		25.35
Max air draft - 2		-
Distance from keel to top antenna -1		28.80
Distance from keel to top antenna -2		-
Water ballast capacity		1 704.60
Fuel main engine - capa.(cbm)		172.00
Fuel aux engine - capa.(cbm)		32.50
Speed service, knots		12.50
Cargo gear	Gearless	No
Bow thruster	250 Kw.	Yes
Boxed		Yes
Double skin		Yes
Open hatch		Yes
Rhine fitted		No
Ammonium Nitrate fitted		Yes
FeSi fitted		Yes

Hatch details:
a : Distance from waterline fully ballasted to top of hatch coamings
b : Distance from waterline fully loaded to top of hatch coamings
c : Distance from tank top to top of hatch coamings
d : Max permissable loading on hatch covers
e : Distance from ship's rail to inside hatch coamings
f : Height of hatch coamings
g : Hatch opening
h : No. of Loadingholes on hatchcovers X diameter in mm

Remarks :
Two movable bulkheads, 5 positions each hatch.
Height under strongbeam 5.59m. Free height under hatch hinges 8.01m.
Fixed platform and removable ladder under strongbeam, port side.
Sloping sides fwd in hold, distance 5.33m from fwd end.
Length of fully boxed hold (with movable bulkhead in fwd position) = 63.10m.
Free length boxed hatch No.1 w/bulkhead in fwd position = 30.85m,
free length hatch No.1 w/bulkhead in aft position = 37.10m.
Free length hatch No.2 w/bulkhead in fwd or aft position = 30.50m
Bunker cons. aux engine in port only.

Htch#	a	b	c	d	e	f	g	h
1	5.72	3.49	8.17	1.70	1.30	1.60	37.95 x 10.20	8 x 650mm
2	5.72	3.49	8.17	1.70	1.30	1.60	31.20 x 10.20	8 x 650mm

Hold#	Bale cbm	Bale cbft	Grain cbm	Grain cbft	Hold dimensions
1	5841	206 275	5841	206 275	69.86 x 10.20 x 8.01

Compartm : #	cbm
A	551
B	498
C	700
D	698
E	828
F	583
G	656
H	644
I	683

Communication :

Type	No	Equipment
Telex 1	431417910	Inmarsat
Telex 2	431417911	Inmarsat
Tlph 1	+47 932 30 836	Gsm
Tlph 2		
Fax		
Email	w-caen@gtw.dualog.com	